

PVC floor tiles

:: Main features

- PVC tiles with exclusive interlocking system
- Size : 500 x 500 mm ; 4 tiles / m²
- Weight : 2.150 kg / tile ; 8.60 kg / m²
- Access ramp : 480 x 500 mm
- Thickness : 7 mm
- Finishing : fine embossed finish
- Antistatic floor tiles
- In accordance with CE standards
- Indoor use only (varnish in option for outdoor use)
- Digital printing with UV ink
- Eco-friendly produit (100% recyclable)

Technical features	Standard	Measure Unit	Tiles
Hardness	ISO 868	Shore A	91,7
Abrasion	NF EN 660-1	mm	0,10 i.e. 1,5% of the thickness
Resistance to compression	NF P 15 451 CSTB	kg/cm ²	516
Toughness (resistance to pull) - for 1% elongation - for 2% elongation	MI UEAtc	kg/m	836 1378,5
Elongation before rupture	NF T 46 002	%	126,8
Force to rupture	NF T 46 002	Ton/m ²	1376
Dimensional stability	NF EN 404	%	0,34
Bending to heat - initial - final	NF EN 434	mm	0,2 0,8
Standard indentation - under load - remanent	NF EN 433	mm	0,10 0,01
Intense indentation - under load - remanent	NF EN 433	mm	0,17 0,07
Resistance to natural light through a window	NF EN 20105-B02	Scale 1 to 5 where 5 is the most resistant	5 (no damage)
Chemical resistance - common acids - common bases - oils - gas-oil - solvents	CSTB 2954		- no deterioration - not resistant to prolonged contact
U.V. stability			Good
Inflammability	EN 13501-1		Cfl-s2 (hardly inflammable)
Slipping test Coefficient of dynamic friction	EN 13893		0,75

PVC floor tiles

Laying and maintenance practices


:: Our recommendations for laying PVC floor tiles

Preparation

- Make sure that the floor is hard, flat, dry and smooth, to prevent distortion at the tile surface.
- Clean the surface.

Tile layout

- Tiles labelled with a number at the back (example : A01, A02, etc.) and supplied with a layout plan.
- Linear laying recommended (start with row A, then B, etc.).

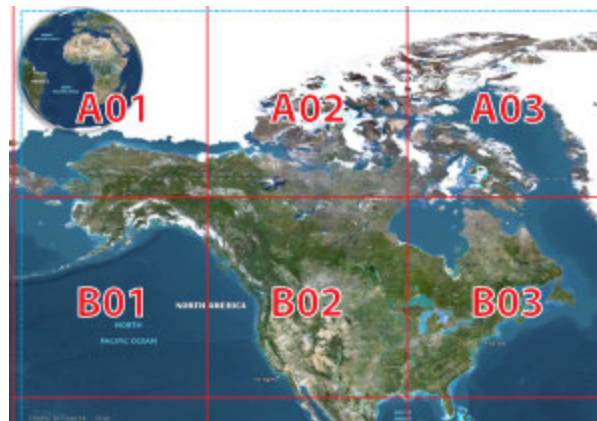

Example of layout plan

:: Our cleaning advice

Regular cleaning

Regular and light cleaning is recommended with lukewarm water and a neutral detergent. Use either a hand mop, a single rotary brush machine or a rotary scrubber dryer, fitted with nylon brushes with soft hair.

Do not use :

- Wax with solvent, vitrifying varnish, black soap, linseed oil products, acetone, trichloroethylene.
- Powders, nylon brushes with hard hair and abrasive scouring pads.